


Screw Extractor & Drill Set

11225SQ

- Easy to remove 5~14 mm broken screws
- 15 PC. HSS drill bit & center guide
- 10 PC. extractor pin & nut

 0.79  1 / 20

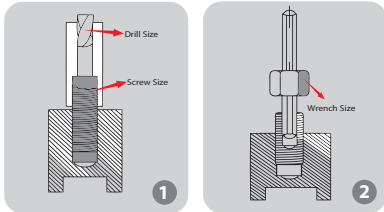

25
PC.

Blow case size (mm) :
260 x 175 x 60 (0.096CUFT)



- Use the guide to drill a pilot hole in the center of broken screw



- Put on extractor nut turning out broken screw with wrench

Nut Splitter Set

9TD062

- For removing stubborn nuts or over tightened bolts without damaging the bolt thread
- Suitable for nuts to a tensile class 6
- Do not overtighten to prevent damage to the threads under the nut

 0.61  12 / 36

KT NO.	Capacity inch	mm	Hex (mm)
9TD602	1/2"~5/8"	12~16	14
9TD603	5/8"~7/8"	16~22	19



2
PC.

9TD064

Blow case size (mm) :
260 x 175 x 60 (0.096CUFT)

 1.89  1 / 12

KT NO.	Capacity inch	mm	Hex (mm)
9TD601	5/16"~1/2"	9~12	12
9TD602	1/2"~5/8"	12~16	14
9TD603	5/8"~7/8"	16~22	19
9TD604	7/8"~1-1/8"	22~27	21



4
PC.